



LOOK · CHANGE · SMILE




**COSIFLOR<sup>®</sup>**

Pleated Blinds



## PLEATED BLINDS – ambience for your home

Create a peaceful haven and get a little closer to nature – Cosiflor pleated blinds are ideal for this. Not only on account of the calming green colour shades and attractive designs, but also thanks to the size range of max. 230 x 260 cm for freehanging systems.

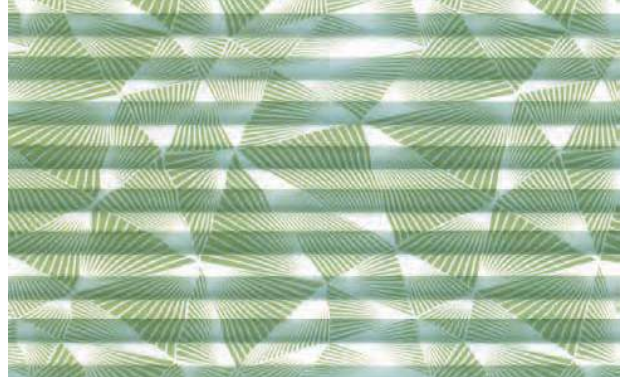

Dessin 40183, Triangle Perlmutter Color




Dessin 40183, Triangle Perlmutter Color



Dessin 40163, Planta Perlmutter Color

No matter what kind of ambience you wish to create – our collection has more than 400 fabric versions to offer in a varied range. Suitable for every requirement: Plain colours, structures and prints, with pearl coating on the back or flame-retardant.

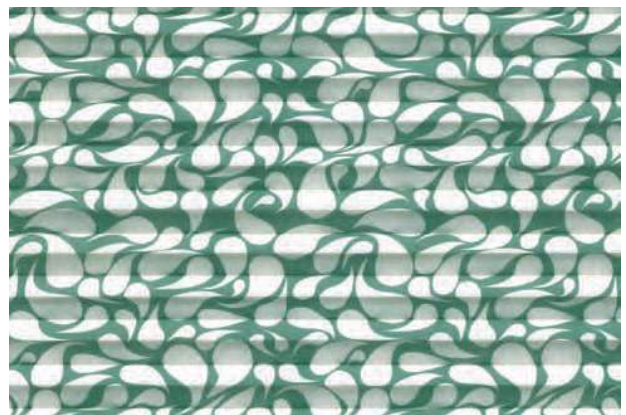

Dessin 40163, Planta Perlmutter Color



## For optimum PRIVACY AND SUN PROTECTION

Pre-tensioned Cosiflor pleated blinds are particularly popular. They offer tailor-made solutions for almost all window shapes. Model type VS 2 is extremely variable in operation: whether from top down or bottom up or both operating versions in one system – everything is possible.




Dessin 10009, Cara



Dessin 10009, Cara



Dessin 30792, Picnic

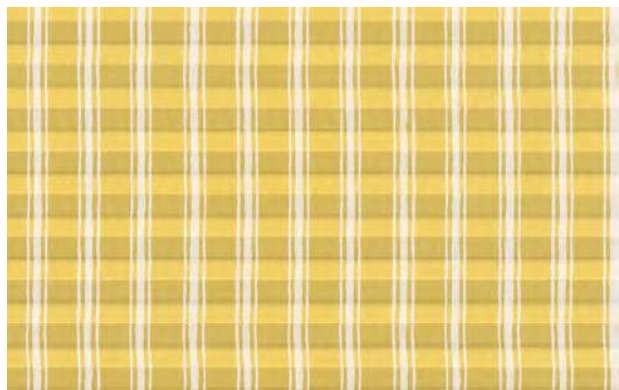


Dessin 30792, Picnic


Fresh colours and cheerful patterns make for a good mood. For this reason, many of our products are also available in bold colour. See for yourself!

## COSIFLOR VS-Blinds (not all model types displayed)


Pre-tensioned for vertical tilt and turn windows / balcony doors




VS 2




VS 2 Slide



VS 3



VS 5

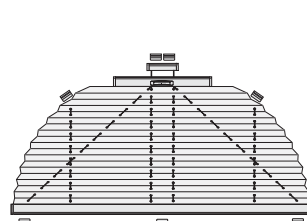

SR 1S

### Size Ranges

#### VS 2 / VS 2 Slide / VS 3

max. width 150 cm / max. height 150 cm or  
max. width 120 cm / max. height 220 cm

#### VS 5

max. width 150 cm / max. height 150 cm or  
max. width 120 cm / max. height 200 cm

#### SR 1S

max. width 150 cm / max. height 150 cm

### Features

**VS 2** pre-tensioned with two operating rails

**VS 2 Slide** guided at the side by adhesive strip – installation requires no drilling


**VS 3** pre-tensioned with two fabrics and two operating rails

**VS 5** pre-tensioned, pentagon with two operating rails


**SR 1S** movable half circular with one operating rail

## COSIFLOR F-Blinds (not all model types displayed)


Freehanging for vertical tilt and turn windows / balcony doors




F 1




F 3




F 4



F E



F Slope 2



F Touch

### Size Ranges

#### F 1 / F 4 / F E

max. width 230 cm / height 260 cm

#### F Touch

max. width 230 cm / height 210 cm

#### F 3

max. width 150 cm / height 260 cm

### Features

**F 1 / F 3** with cord lock – fabric stack doesn't sag

**F 4** with endless chain or cord – no gear overlapping on the sides

**F E** with motor – operable by switch, remote control or timer


**F Slope 2** with cord lock – stack retracts fully to the angled rail

**F Touch** freehanging system with handle operation – child-safe




## COSIFLOR DFC- und DF-Blinds


Pre-tensioned for roof-windows




DF Comfort 10




DF Comfort 20




DF Comfort 30



DF 10



DF 20



DF 30

### Size Ranges

**DFC 10 / DFC 20 / DFC 30 / DF 10 / DF 20 / DF 30**

max. height 150 cm / max. width 150 cm

### Features


**DF Comfort 10 / 30** with guide bars, cover and one operating rail

**DF Comfort 20** with guide bars and two operating rails


**DF 10 / 30** with one operating rail  
**DF 20** with two operating rails

## COSIFLOR PL-Blinds (not all model types displayed)


Roof blinds for glazed roofs and conservatories




PL 11




PLK 13



PLE 12



PL 31

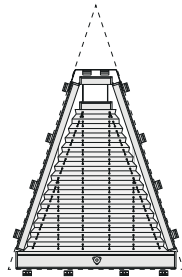

PLK 32

### Size Ranges

**PL 11 / PLK 13 / PLE 12**

max. width 150 cm / max. height 400 cm

**PL 31 / PLK 32**

max. width 150 cm / max. height 200 cm

### Features

**PL 11** with operating rod

**PLK 13** with operating crank

**PLE 12** with motor

**PL 31** trapezium with one slope, angle range 15° - 80°

**PLK 32** trapezium with two slopes and crank operation, angle range 15° - 70°

Further model types and detailed technical information can be found in the Cosiflor sales catalogue.





**For further advice and assistance:**